AZERTEXNOLAYN

MANHOLE COVER D400(K)

General information

Recommended location: highways. Purpose: engineering networks

1. General information and specifications:

Standard; EN 124-2 ; GOST 3634-2019
Body size; 822x740 mm
Opening diameter of the passage; 603 mm
Body height; 200 mm
Regulatory load; 400 kN
Weight; 79.5 kg
Material: high-strength spherical graphite cast iron GGG50

2. Advantages:

- the cover is attached to the body with a hinge;
- availability of auto-locking system;
- black bitumen paint is applied for an aesthetic appearance.

AZERTEXNOLAYN LLC reserves the right to make changes in design and materials that do not impair performance 1-May-2020

COPYRIGHT©AZERTEXNOLAYN LLC 2020

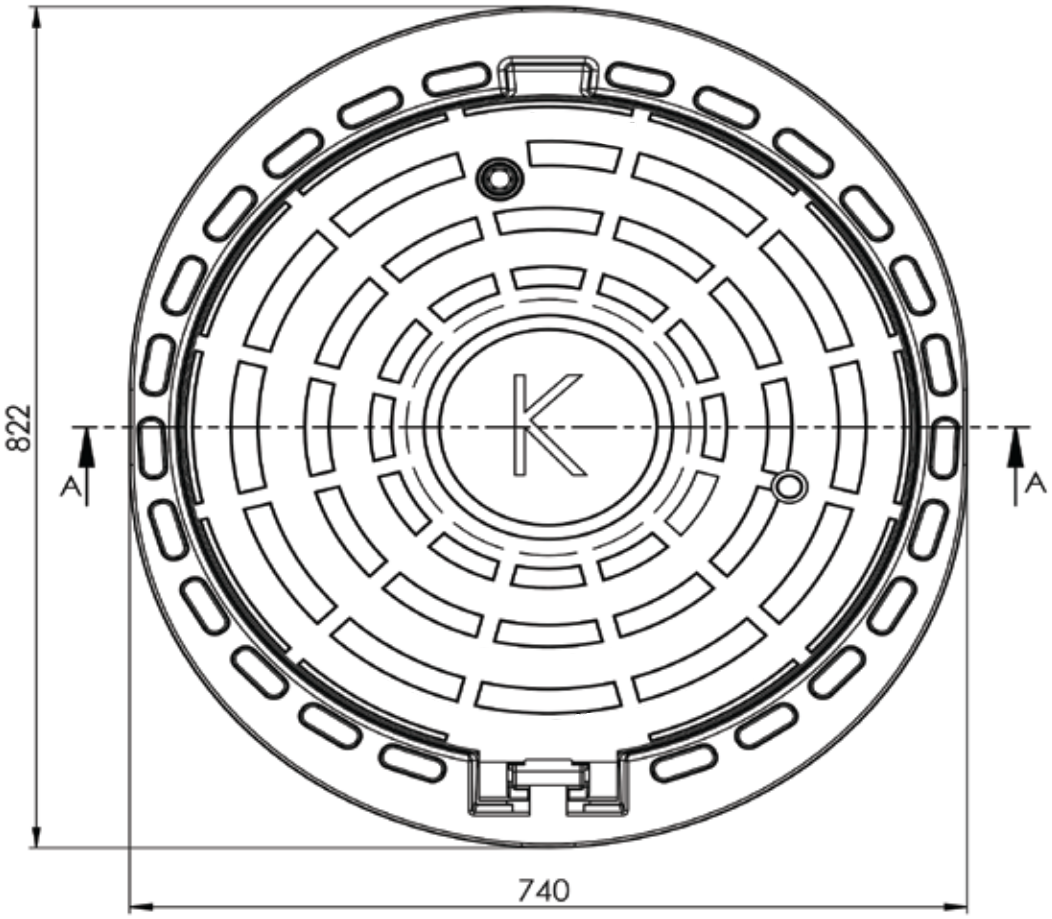

A-A

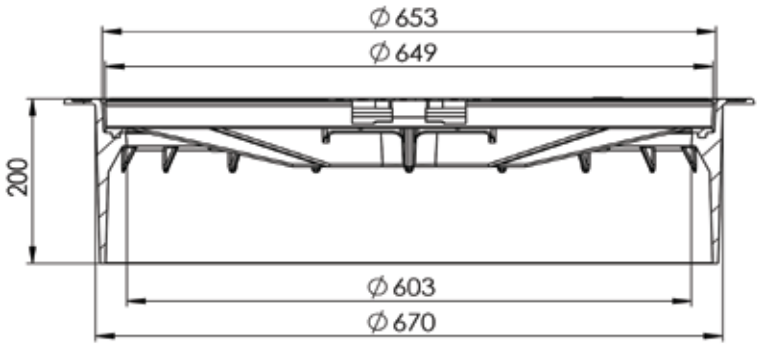



AZERTEXNOLAYN LLC reserves the right to make changes in design and materials that do not impair performance

1-May-2020

COPYRIGHT©AZERTEXNOLAYN LLC 2020

3. Supply set	
DETAIL	**QUANTITY**
Body	1
Cover	1
Locking system	1
Bolt	1
T-rubber	1
Passport	1
*It is allowed to prepare 1 passport for a group of manhole covers of not more than 10 pieces.	

4. Warranty obligations:

The warranty period is 3 years from the date of commissioning, but not more than 5 years from the date of shipment from the enterprise.
Assigned service life- 20 years
Storage conditions of manhole covers–group, GOST 15150
The limiting criterion is the presence of damage (cracks, debris, etc.)

5. Usage information:

At the end of its service life, the product is not dangerous for life, human health and the environment. The use of a manhole cover can be done in any way, without restrictions.
*Note: Assignment of engineering networks:

- Domestic and industrial sewerage;
- Plumbing;
- Fire hydrant;
- Rainwater sewerage;
- Heating line;
- Gas line;
- City cable network;
- City telephone network;

COPYRIGHT©AZERTEXNOLAYN LLC 2020