



## HEAVY MANHOLE COVER (C250)K



### General information

Recommended location: dense city highways. Purpose: engineering networks.

### 1. General information and specifications:

Standard; EN 124-2 ; GOST 3634-2019

Body size; 800x730 mm

Opening diameter of passage; 598 mm

Body height; 80 mm


Regulatory load; 250 kN

Weight; 53.2 kg


Material: high-strength spherical graphite cast iron GGG50.

### 2. Advantages:

- the cover is attached to the body with a boltless hinge;
- availability of locking system;
- black bitumen paint is applied for an aesthetic appearance;

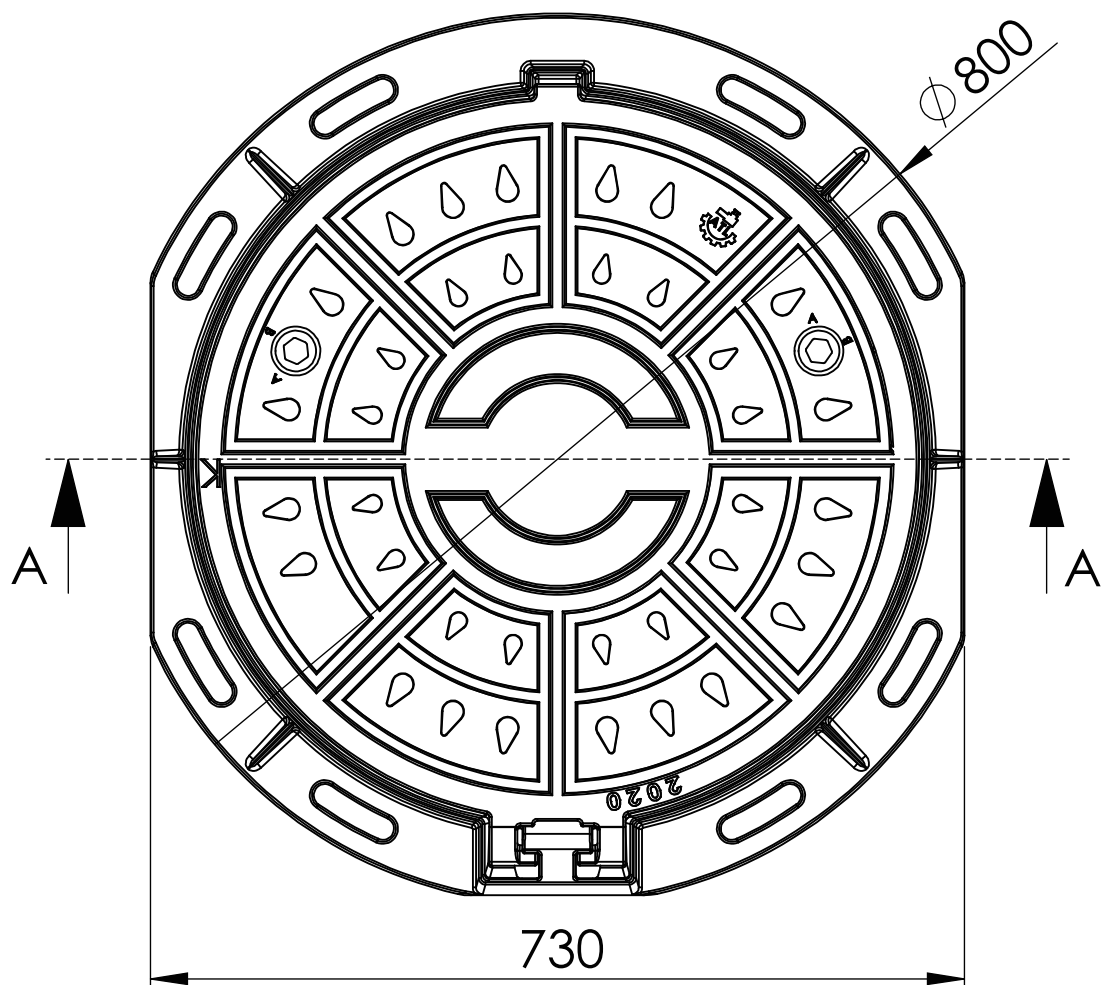

A-A

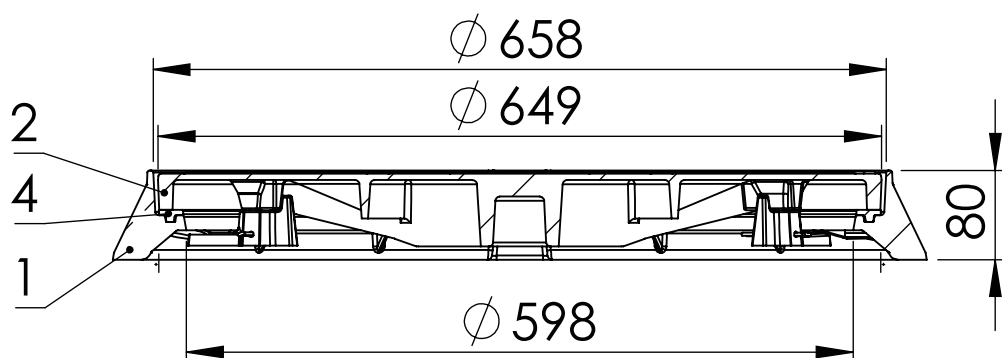

**2. Supply set**

DETAIL	QUANTITY
Body	1
Cover	1
Locking system	1
Bolt	1
T-rubber	1
Passport	1
*It is allowed to prepare 1 passport for a group of product of not more than 10 pieces.	

**3. Warranty obligations:**

The warranty period is 3 years from the date of commissioning, but not more than 5 years from the date of shipment from the enterprise.

Assigned service life- 20 years

Storage conditions of rainwater grilles—group Ж 1 GOST 15150

The limiting criterion is the presence of damage (cracks, debris, etc.)

**4. Usage information:**

At the end of its service life, the product is not dangerous for life, human health and the environment. The use of a rainwater grill can be done in any way, without restrictions.

\*Note: Assignment of engineering networks:

- Domestic and industrial sewerage;
- Plumbing;
- Fire hydrant;
- Rainwater sewerage;
- Heating line;
- Gas line;
- City cable network;
- City telephone network